

NEW **PREMIUM**
★★★★



1 KERN ABP 100-5DM with optional ionizer

1 NEW: Extremely fast ionization process, thanks to the latest generation of KERN ionization technology to neutralise electrostatic charge for fixed installation in the analytical balance. Particularly convenient handling as you no longer need a separate device. Simply enable the ionizer fan at the push of a button. Suitable for all models

Premium analytical balance with the latest Single-Cell Generation for extremely rapid, stable weighing results




Bright OLED display with large viewing angle for the very best readout from a wide range of lines of sight or poor lighting conditions



USB data interfaces and RS-232 for transferring weighing data to the PC, tablet, printer, USB as well as connecting external devices, such as barcode scanner (option), numeric keypad (option) etc.



GLP/ISO record keeping professional and detailed GLP protocol, so that the scale is fully compliant with the relevant standard requirements according to ISO, GLP and GMP

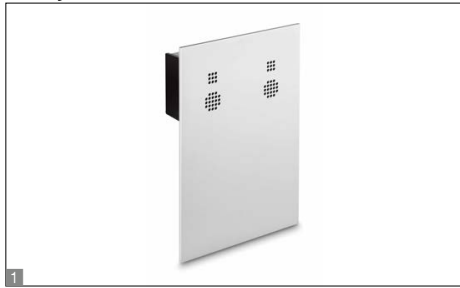

Features

- This new generation of analytical balances combines the highest level of precision with large weighing capacities. Thanks to the new Single-Cell Generation, the weighing result is displayed in a fraction of the time with comparable models. Together with the intuitively structured menu, this means that you can work efficiently and rapidly
- **Navigation pad** for super quick navigating through the menus
- **Automatic internal adjustment** in the case of a change in temperature $\geq 1\text{ }^{\circ}\text{C}$ or timecontrolled every 4 h, guarantees high degree of accuracy and makes the balance independent of its location of use. For applications which do not require verification the time interval can be individually adjusted
- The **Minimum weight of sample** can be manually stored in the device or automatically calculated. For weighings below this value, the balance issues a warning message
- **Dosage aid:** High-stability mode and other filter settings can be selected
- **Simple recipe weighing and documenting** with a combined tare/print function. In addition, the ingredients for the recipe are numbered automatically and printed out with their corresponding number and nominal weight
- **Individual user settings for up to 10 users can be saved:** user name/user number (can be printed out or added to the record for each process), password, menu language, user profiles, accessing user settings via barcode, additional guest mode for users who are not logged in, authorizations, eg. B. balance adjustment, changing settings or conditioning or modification of a recipe only by the authorized person & performing the formulation by the user

- **U.S. FDA 21 Part 11:** assists you in data integrity in accordance with U.S. Pat. FDA 21 Part 11 (for example (weighing result, sample ID, user name, scales ID, ...))
- Menu language DE, GB
- **Automatic data output to the PC/printer** each time the balance is steady
- **Large glass draught shield** with 3 sliding doors for easy access to the items being weighed.
- **Multi-function weighing plate** included with delivery, minimises the effect of currents of air in the weighing space and therefore significantly improves the stabilization time and repeatability. In addition samples, sample paper, PCR containers, micro centrifuge tubes and many other items which protrude can be easily fixed in place and weighed easily
- **Protective working cover included with delivery**

Technical data

- Luminescent OLED display, digit height 14 mm, bright with high contrast, for easy reading of the weight, even in poor lighting conditions
- Dimensions weighing surface \varnothing 91 mm
- Overall dimensions (incl. draught shield) WxDxH 213x407x344 mm
- Weighing space WxDxH 166x156x220 mm
- Net weight approx. 8 kg
- Permissible ambient temperature $10\text{ }^{\circ}\text{C}/30\text{ }^{\circ}\text{C}$


Accessories

- **Protective working cover**, scope of delivery: 5 items, KERN YBA-A06S05, **€ 40,-**
- **Draft shield rear panel with integrated ionizer** to neutralise electrostatic charge. Is fitted in place of the existing glass rear panel of the draft shield. Suitable for all models in the KERN ABP range, please order at the time you order your balance, the scope of delivery is the rear panel, ionizer, power supply. Factory Option, KERN ABP-A01, **€ 1710,-**
- **Weighing table** to absorb vibrations and oscillations, which would otherwise distort the weighing result, KERN YPS-03, **€ 990,-**
- **Minimum weight of sample**, smallest weight to be weighed, depending on the required process accuracy, only in combination with a DAkkS calibration certificate, KERN 969-103, **€ 10,-**
- **Equipment qualification:** compliant qualification concept which includes the following validation services, Installation Qualification (IQ), Operating Qualification (OQ), KERN 961-231B, **€ 750,-**
- Further details, plenty of further accessories and suitable printers see *Accessories*

Single-cell advanced technology:

- **Fully automatic manufactured weighing cell from one piece of material**
- **Stable temperature behaviour**
- **Short stabilisation time:** steady weight values within approx. 2 s! (models with [d] = 0,1 mg), approx. 8 s! (models with [d] = 0,01 mg) under laboratory conditions
- **Shock proof construction**
- **High corner load performance**

STANDARD



OPTION



FACTORY



Model	Weighing capacity [Max] g	Readability [d] mg	Verification value [e] mg	Minimal load [Min] mg	Reproducibility mg	Linearity mg	Price excl. of VAT ex works €	Option			
								Verification		DAkkS Calibr. Certificate	
KERN								M KERN	€	DAkkS KERN	€
ABP 100-4M	120	0,1	1	10	0,1	$\pm 0,2$	1840,-	965-201	110,-	963-101	138,-
ABP 200-4M	220	0,1	1	10	0,1	$\pm 0,2$	2220,-	965-201	110,-	963-101	138,-
ABP 300-4M	320	0,1	1	10	0,1	$\pm 0,3$	2470,-	965-201	110,-	963-101	138,-
Dual-range balance switches automatically to the next largest weighing capacity [Max] and readability [d]											
ABP 100-5DM	52 120	0,01 0,1	1	1	0,02 0,1	$\pm 0,03 0,3$	2660,-	965-201	110,-	963-101	138,-
ABP 200-5DM	102 220	0,01 0,1	1	1	0,02 0,1	$\pm 0,03 0,3$	2850,-	965-201	110,-	963-101	138,-

Note: For applications that require verification, please order verification at the same time, initial verification at a later date is not possible. Verification at the factory, we need to know the full address of the location of use.